



## Product Features

- For use in single and double-hung windows
- Easy raise, lower, and tilt operation
- Streamlined EasyGlide Operator and Ergo Track located on top center
- Easy to maintain – clean with soap and water, or high quality window cleaner
- 10-year full warranty
- Blinds certified safe for children and pets with no exposed cords




Sizes	
IG thickness	7/8"
Height range	12" to 41"
Width range	15" to 54"
Size increments	1/16" (height & width)
Max IG size	Annealed glass: 9 sq. ft. Tempered glass: 9 sq. ft. (no more than 36" in one direction)

Please refer to chart located on the right for custom size options.

Low-E Options	
Single	270, 272, 340 and 366
Dual	189/270, 189/272, 189/340, and 189/366


Glass Coating Options	
NEAT	270, 366, 189/270, and 189/366

## Custom Size Options


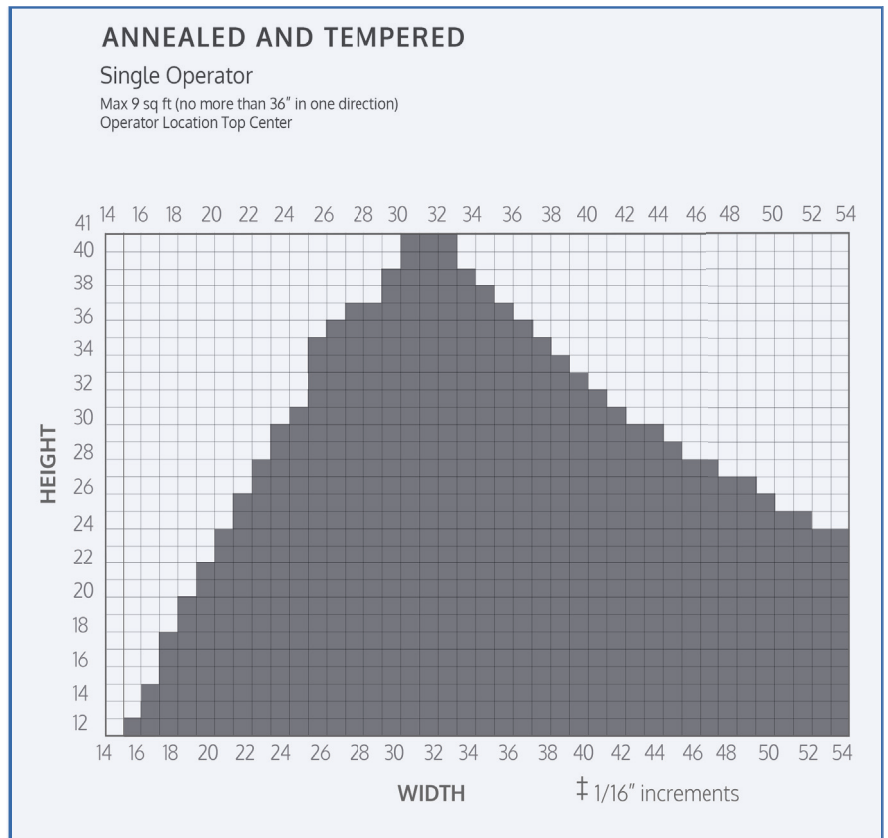


## Finish Options

Blind slats, operators, operator track and decorative cover caps are available in six different colors

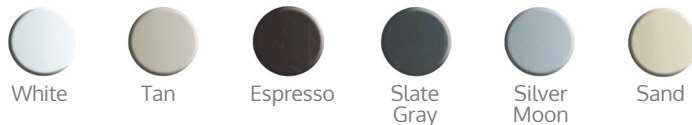

## Technical Drawings & Specifications

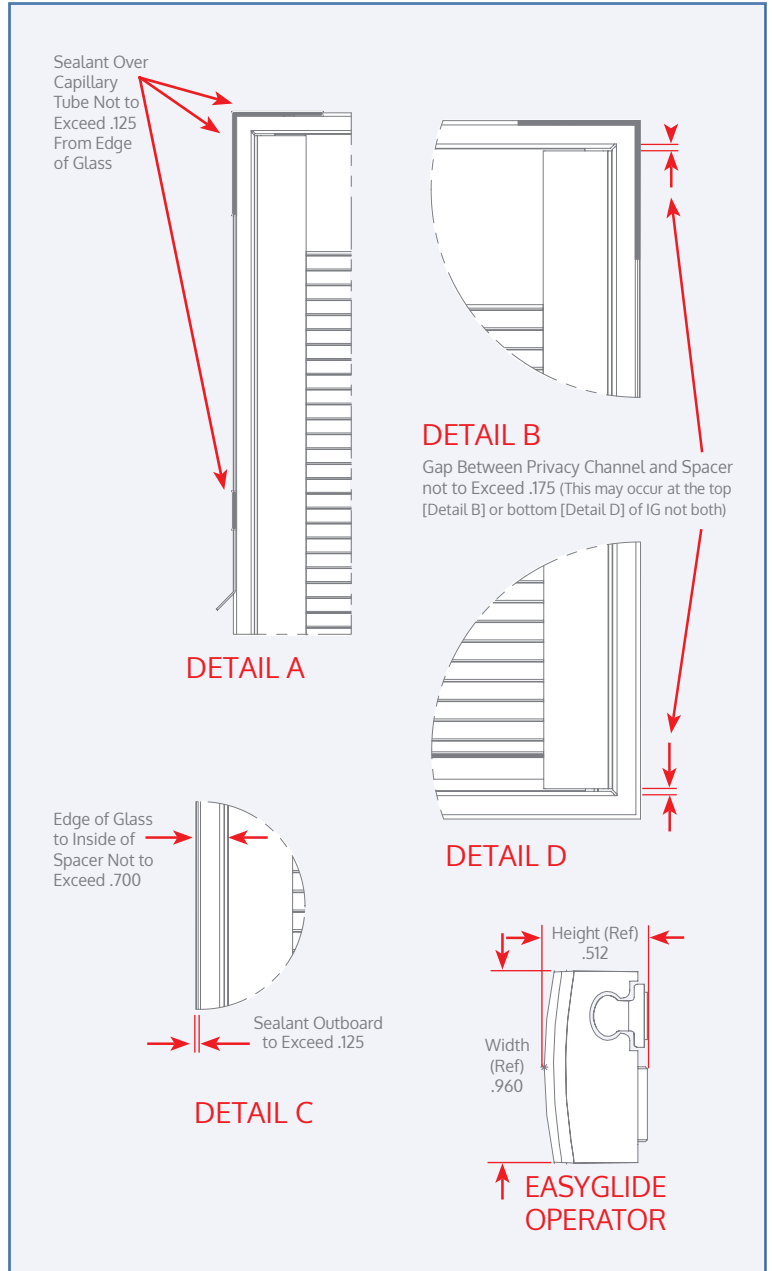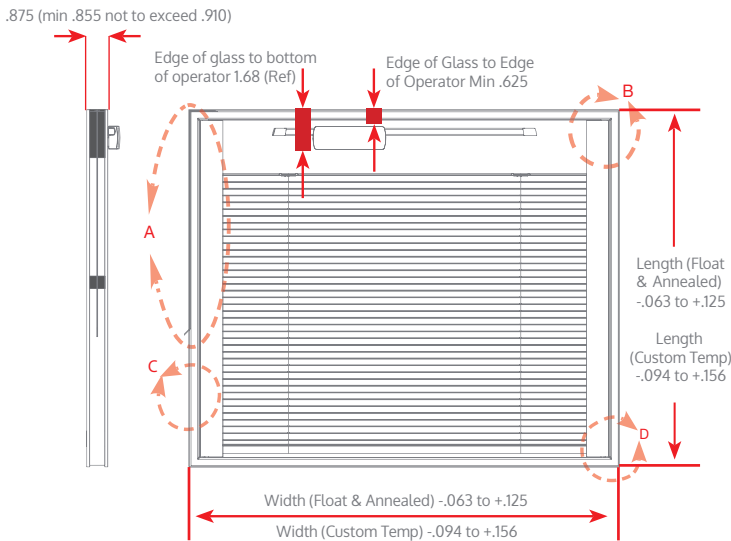

### Materials

Spacer	Intercept®, tin plated steel
Glass (Standard or Low-E)	1/8" annealed or 1/8" tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (189)
Glass Coating	NEAT: 1st surface (270, 366, 189/270, 189/366)
Blind Slat	10.5mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer

### Code of Compliance

IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	ASTM C1036-16 (annealed) & C1048-12 (tempered)
ANSI (safety)	ANSI / WCMA A100.1-2018
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	CAD available for simulations

### Operation

Blind Function	Raise, Lower, and Tilt
EasyGlide Operator	Clear Overmold/Two Shot
Single Operator	Annealed glass: Up to 9 sq. ft. or Tempered glass: Up to 9 sq. ft.
Capillary Tube	Do not block, crush or cut
Operator Position	Top Center (Next to Ladder Cord)

U.S. Patent No. 10,876,353 B2