



## Product Features

- For use in single and double-hung windows
- Easy raise, lower, and tilt operation
- Streamlined EasyGlide Operator and Ergo Track™ located on top center
- Easy to maintain – clean with soap and water, or high quality window cleaner
- 10-year full warranty
- Blinds certified safe for children and pets with no exposed cords




Sizes	
IG thickness	7/8"
Height range	12" to 41"
Width range	15" to 54"
Size increments	1/16" (height & width)
Max IG size	Annealed glass: 9 sq. ft. Tempered glass: 9 sq. ft. (no more than 36" in one direction)

Please refer to chart located on the right for custom size options.

Low-E Options	
Single	270, 272, 340 and 366
Dual	189/270, 189/272, 189/340, and 189/366

Glass Coating Options	
NEAT	270, 366, 189/270, and 189/366

## Custom Size Options

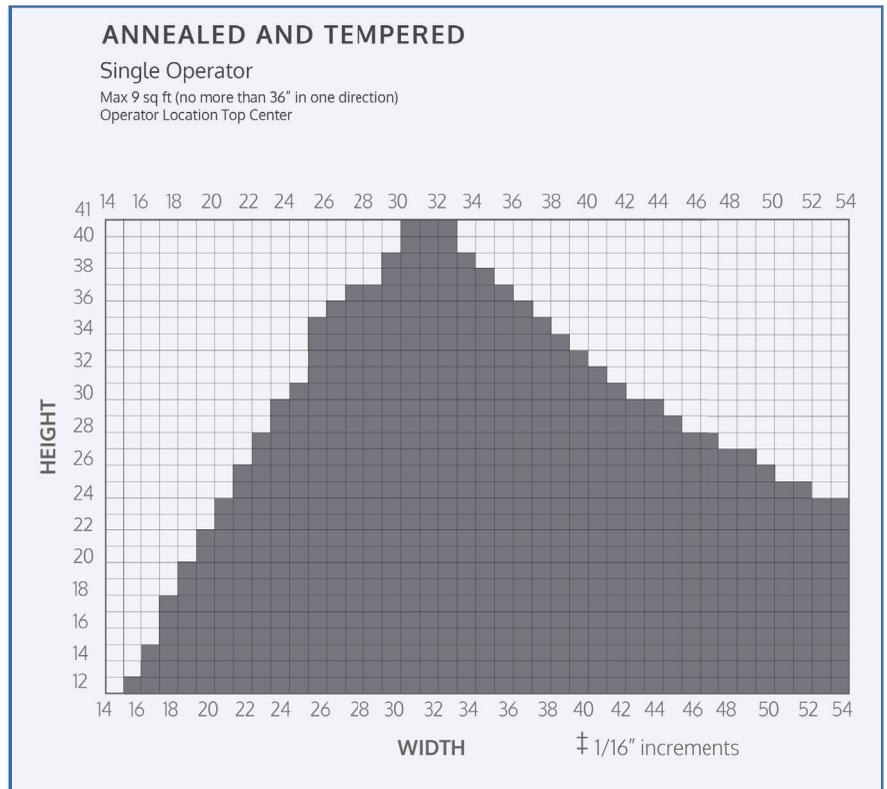

## Finish Options



Blind slats, operators, operator track and decorative cover caps are available in six different colors



## Lead Times

Annealed	US: 7 business days + transit Canada: 9 business days + transit
Tempered	US: 12 business days + transit Canada: 14 business days + transit

### Technical Drawings & Specifications

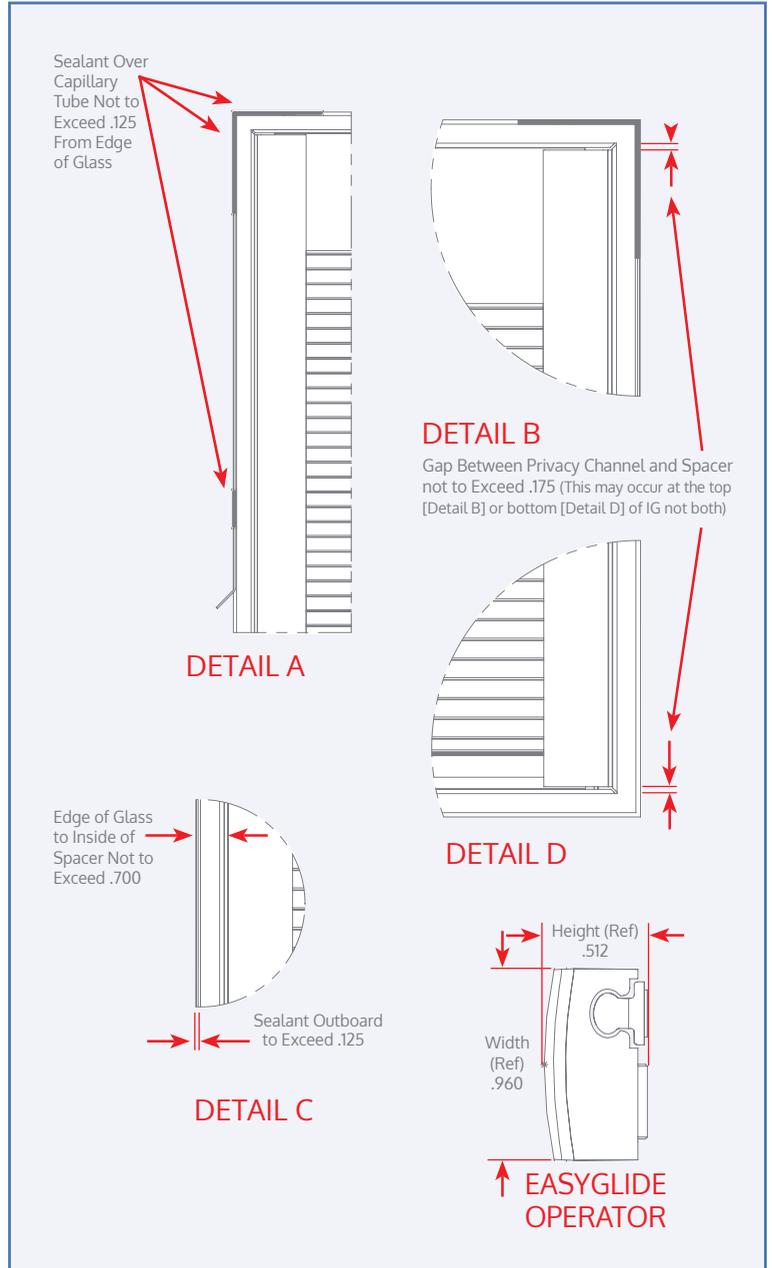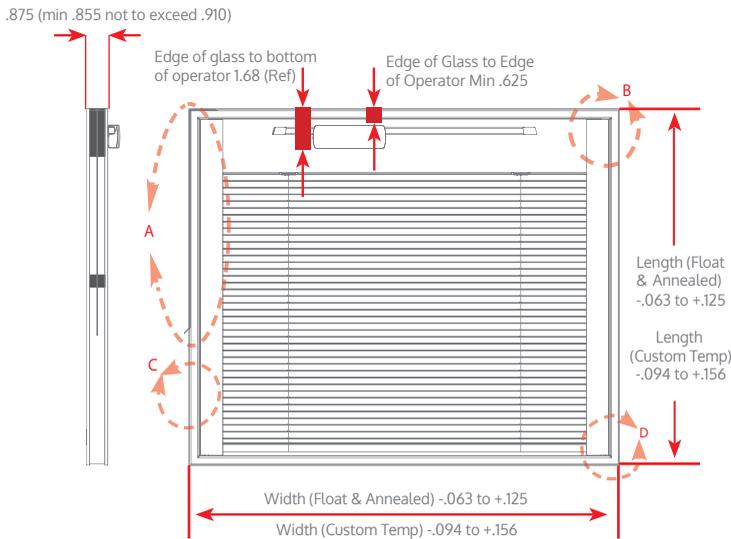

Materials	
Spacer	Intercept®, tin plated steel
Glass (Standard or Low-E)	1/8" annealed or 1/8" tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (189)
Glass Coating	NEAT: 1st surface (270, 366, 189/270, 189/366)
Blind Slat	10.5mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer

Code of Compliance	
IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	ASTM C1036-16 (annealed) & C1048-12 (tempered)
ANSI (safety)	ANSI / WCMA A100.1-2018
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	CAD available for simulations

Operation	
Blind Function	Raise, Lower, and Tilt
EasyGlide Operator	Clear Overmold/Two Shot
Single Operator	Annealed glass: Up to 9 sq. ft. or Tempered glass: Up to 9 sq. ft.
Capillary Tube	Do not block, crush or cut
Operator Position	Top Center (Next to Ladder Cord)

U.S. Patent No. 10,876,353 B2